

handle applicators machines

This handle applicator provides a safe, strong and ergonomic handle. We are committed to exceed the expectations of those who seek the best.

>> general features

The automatic handle applicators can apply handles on shrink film packs, cardboard cases, briks, paper rolls or any type of rigid packs. In addition products can pass through the automatic handle applicators without any handle being applied on them. The automatic handle applicators can apply different types of handles, joined to a transparent adhesive tape and made from: precut cardboard labels, pre-handled adhesive tape reels, paper and polypropylene handles on reel. At the moment, 4 models are available, differing in the their speed: outputs up to 25, 40, 60, 80 packs for minute PPM- depending on the pack dimensions.

>> specific features

Thanks to the new optional handles on reel Bel are even more flexible, allowing to use also paper and polypropylene tape reels. In this case the paper or polypropylene reel is cut and applied onto the adhesive tape, as an alternative to pre-cut cardboard or per-handler adhesive tape. Thanks to the large reel diameters, waiting times are reduced.

DOVERCO

Strategic. Packaging.

2111 32nd Avenue, Montreal, Quebec H8T 3J1
Tel: (514) 420-6060 • Fax: (514) 420-6015

250 Trowers Road, Unit 7, Vaughan, Ontario L4L 5Z6
Tel: (289) 256-2141 • Fax: (289) 256-2142

Toll Free: 1-800-363-0697 • www.doverco.ca • sales@doverco.ca

>> details



Precutting device for carton & carton's stock.



Double dispenser unit for adhesive tape.



Double dispenser unit for cartons rolls. Optional: handles on rolls.



Easy access with opening windows-doors.




Intralox belt.



Fast change of format, sizes indicated on the metric line.



Can be integrate in our packaging lines.

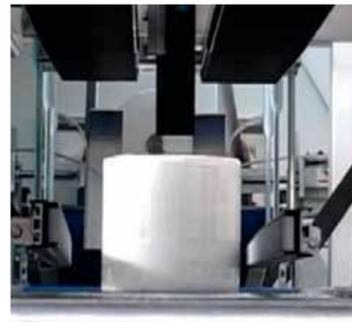

High speed. Up to 80 pcs/min, easy change of format.



High quality ISO certificated components.

PREFERRED PACKAGING ITALY
leader in the manufacturing packaging equipment

**DM
PACK**

>> **BEL**

handle application machines




GB

BEL/0/02014 - rettangolare.it

BEL


handle application machines

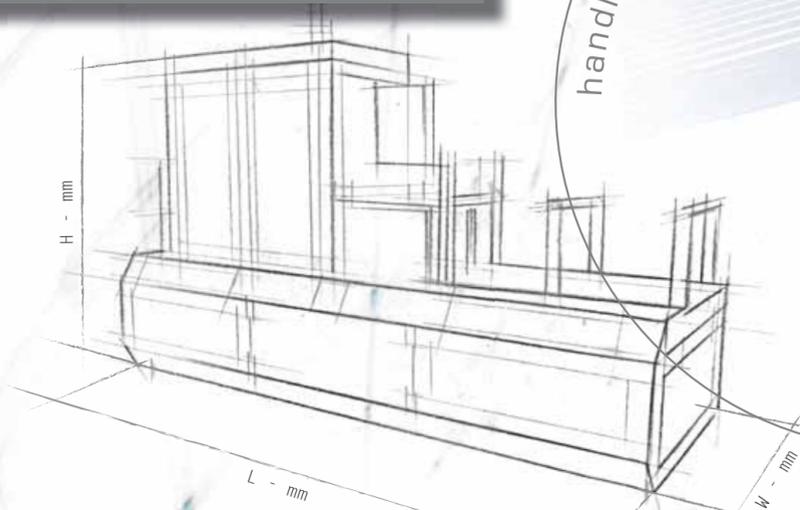

>> technical features

MOD.	25	40	60	80
Machine dim. (LxWxH)	2660x1055x2155-2315	3520x1055x2155-2315	3520x1055x2155-2315	4155x1055x2155-2315
Speed	25 p/min	40 p/min	60 p/min	80 p/min

ADHESIVE TAPE 6 PRE-HANDLED REELS TECHNICAL FEATURES	MONO ORIENTED POLYPROPYLENE
Tape support thickness (in accordance with pack size)	50 my
Tape total thickness	72 my
Adhesiveness on steel	10 (N/25 mm)
Adhesiveness on PE	7,5 (N/25 mm)
Tensile strength (in accordance with pack size)	350 (N/25 mm)
Stretching	> 30%
Length of adhesive tape on reel	up to 6500 m
Adhesive tape width	25 mm
Max. external diameter of the reel	350 mm
Reel minimum core diameter (sleeve)	6"
Reel width	200 mm
Storage conditions	10° - 40°C - humidity from 40% al 90%

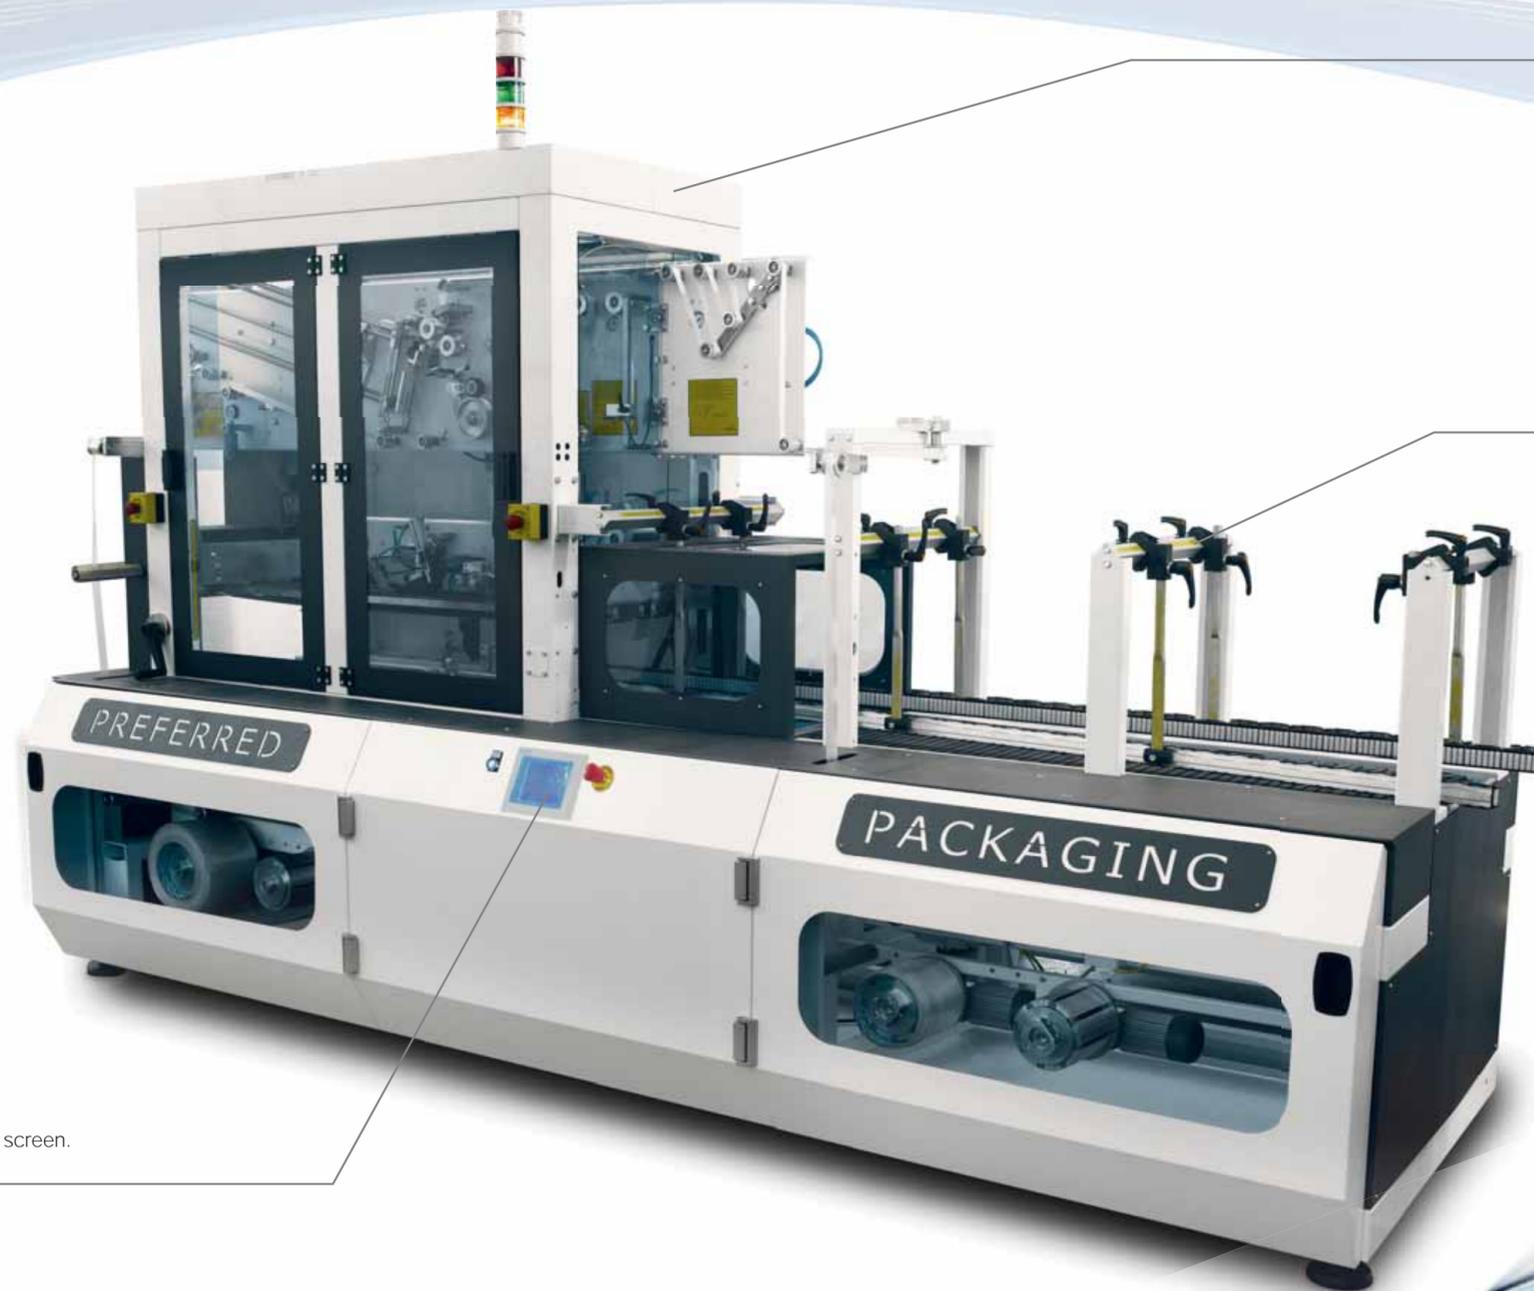

>> Independent and modular unit can be integrated in our packaging lines.

>> Speed: up to 80 packs/min.

>> Siemens touch screen.